


GPON VoIP Gateway AX3000

PON | 802.11ax@5GHz + 802.11ax@2.4GHz | 4x GE LAN | VoIP | USB

GRG-4296U

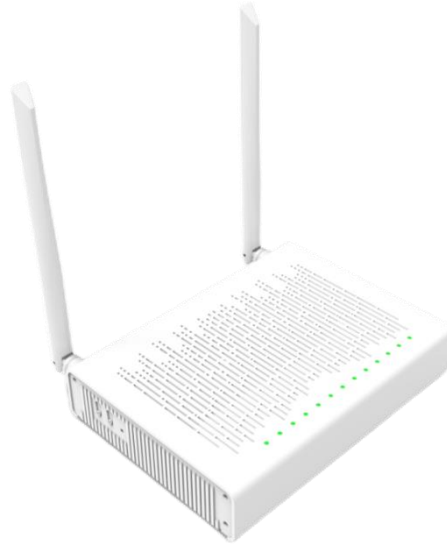

GRG-4296u is a highly integrated GPON access device. It offers high-performance Data, Voice and Video services for individual users, SOHO (small office or home office), small businesses, etc.

GRG-4296u complies with the ITU-T G.984 standard, provides 2.488 Gbps downlink and 1.244 Gbps uplink on the network side, and provides four high-speed GE ports, one FXS port for internet calling, dual-band Wi-Fi 6 (2T2R 802.11ax@5GHz and 2T2R 802.11ax@2.4GHz). The two wireless bands are separated into two dedicated Wi-Fi networks, supporting more end-user devices while reducing signal interference. Furthermore, there is a USB 3.0 host interface on the user side.

KEY FEATURES

- **OFDMA and MU-MIMO:** Supports both up-link and down-link, allowing efficient data transmission for more devices at the same time.
- **Wi-Fi 6:** 2.4GHz wireless 802.11ax compatible 11b/g/n, up to 600Mbps PHY rate
5GHz wireless 802.11ax compatible 11a/n/ac, up to 2400Mbps PHY rate
- **160MHz & 1024 QAM:** Wider band and high definition offer high throughput capability.
- 1 x **USB host** provides high speed access to USB devices such as printer server, 3G dongle, HDD, and has future DLNA connectivity
- **Remote Management:** TR-069 standard data model for ISP remote control

GRG-4296u

PON | 802.11ax@5GHz + 802.11ax@2.4GHz | 4x GE LAN | VoIP | USB

SPECIFICATIONS

HARDWARE	
Flash	256MB Nand Flash
SDRAM	512MB DDR
Interfaces	<ul style="list-style-type: none">▪ WAN: 1x GPON port (SC/APC); Data Rate: Downstream: up to 2.488Gbps; Upstream: up to 1.244Gbps; Receiving wavelength: 1,490 nm; Transmitting wavelength: 1,310 nm; Optical Range: Class B▪ LAN: 4x 10/100/1000 Base-T MDI/MDIX RJ-45 ports Compliant with the following standards: 1. IEEE 802.3/802.3u 2. Hardware-based 10/100/1000, full/half, flow control auto-negotiation 3. Non-blocking wire speed reception and transmission 4. Full duplex IEEE 802.3x flow control and half duplex back-pressure flow control▪ External antennas; 2.4G IEEE 802.11ax, backward compatible with 802.11b/g/n; Up to 600Mbps PHY rate 5G IEEE 802.11ax, backward Compatible with 802.11a/n/ac; Up to 2400Mbps PHY rate▪ FXS: 1x FXS▪ USB: 1x USB 2.0 Host (3.0 optional)
PACKAGE CONTENTS	
GPON ONT (GRG-4296u)	
Power adapter 12VDC/1.5A	
ENVIRONMENT	
Operating Temperature	0 °C to 40 °C
Operation Humidity	10% ~ 95% (non-condensing)

COMTREND

Taiwan:
3F-1, No.10, Lane 609, Chongxin Road, Section 5,
Sanzhong Dist, New Taipei City 241405, Taiwan
Tel: +886-2-29998261

USA & Canada:
530 Technology Dr. Suite 100, Irvine,
CA 92618, USA
Tel: +1-949-753-9640

Spain:
C/ Proci3n, 7 portal 2, 1º C - Edif. Am3rica II
28023 Madrid, Spain
Tel: 34-917990403

Czech Republic:
TOKOVO Jankovcova 1518/2, 170 00, Prague 7,
Czech Republic
Tel: +420-266-782040

India:
446 Sector 8, IMT Manesar, Gurugram,
Haryana 122051, India
E-mail: India_admin@comtrend.com

www.comtrend.com

Maximum performance, actual data rates, and coverage will vary depending on network conditions and environmental factors. Product specifications and design are subject to change without notice.

DS_GRG-4296u_V3.2