

PoE-9212

GIGABIT | POWER OVER ETHERNET (PoE) SPLITTER

PRODUCT OVERVIEW

Comtrend's PoE-9212 Power over Ethernet (PoE) Splitter delivers both data and electrical power to non-PoE devices such as small switches, analog cameras, and routers. The PoE Splitter receives a PoE signal via a PoE Switch or PoE Injector and splits the Ethernet and power into two separate cables. The PoE-9212 allows you to power a non-PoE device without installing costly power outlets and electrical cabling. With power output voltages of 12V, 9V, or 5V DC and no tools or software required, the PoE-9212 offers simplified, flexible network planning.



KEY BENEFITS

Extends Power to Unwired Areas

Power a remote non-PoE device (up to 328ft away) in locations where power is not readily accessible.

Reduces Installation Time & Costs

Eliminates the need to install high voltage outlets and electrical cabling.

Reliable, Flexible Power Supply


Supports 802.3af, ensuring compatibility with other 802.3af PoE Switches or PoE Injectors. It also features PoE short circuit protection to safeguard network devices.

Easy Setup

Plug and play desktop or wall-mounted installation.

PoE-9212

Connects Non-PoE Devices, Splitting the Power and Ethernet into Two Separate Cables

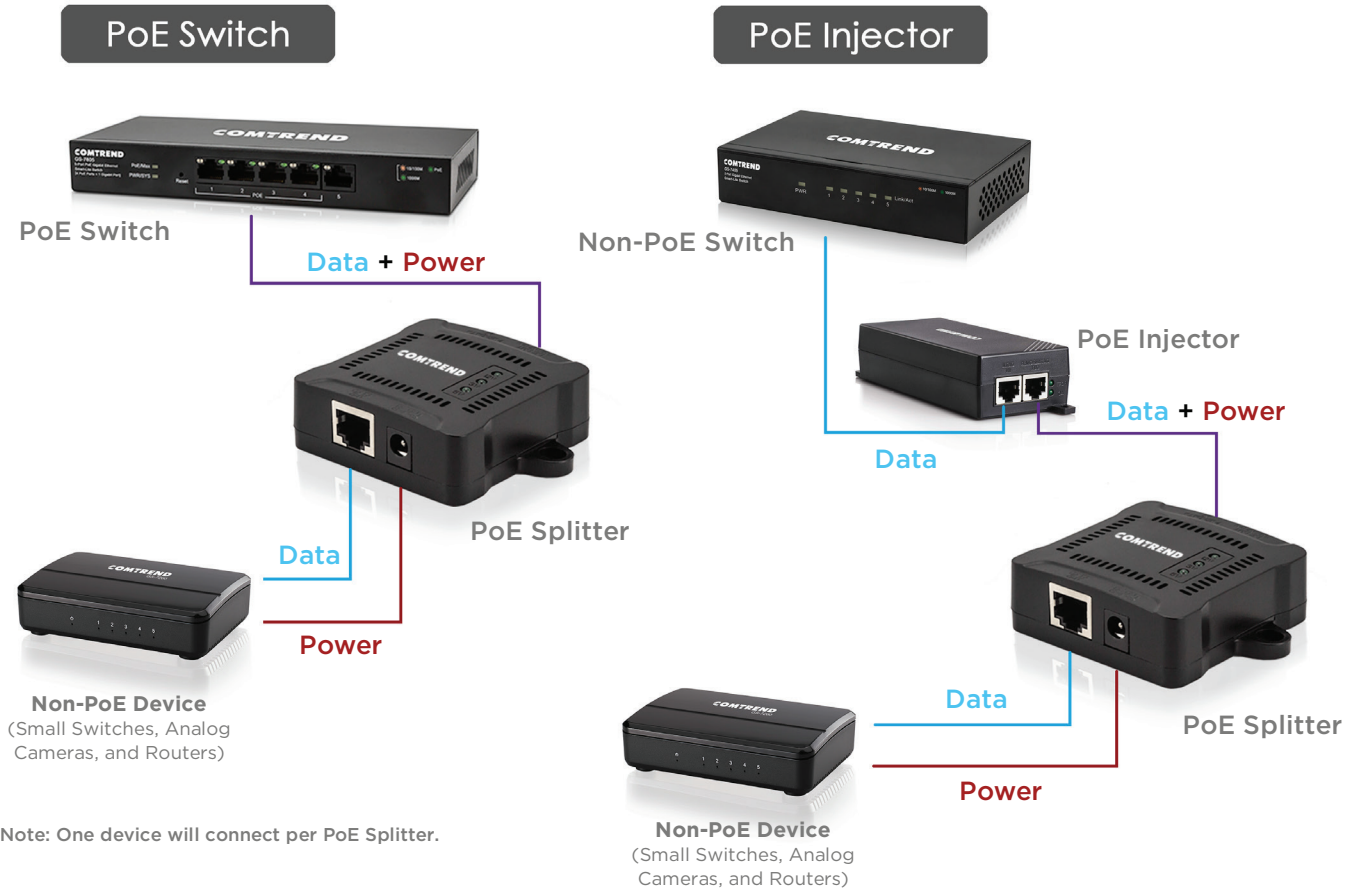

SPECIFICATIONS

Hardware

- 1 DC Out Socket
- 1 DC Out Adjustable Slide Switch for Either 5V DC, 9V DC, or 12V DC Output Power
- 2 x 10/100/1000Mbps Ethernet LAN Ports
 - 1 PoE Power + Data Input Port
 - 1 Data Output Port

Standards

- IEEE 802.3 10BaseT
- IEEE 802.3u 100BaseTX
- IEEE 802.3ab 1000BaseT
- IEEE 802.3af Power over Ethernet

Output Power

- Adjustable 5V, 9V, or 12V

Input Power

- 802.3af PoE Switch or PoE Injector

Environmental Conditions

- Operating Temperature: 32~104°F (0~60°C)
- Storage Temperature: 32~104°F (-20~70°C)
- Relative Humidity: 5~90% RH (Non-Condensing)

Certifications

- CE, FCC

Package Contents

- PoE Splitter
- One DC Power Y Cable
- Quick Installation Guide

Dimensions & Weight

- 2.36in x 2.36in x 0.98in (L x W x H)
- 60mm x 60mm x 25mm (L x W x H)
- 2.12oz; 60g

Note: Specifications are subject to change without notice.

DS_PoE-9212_V1.0.1